


Preventa

The Preventa range enhances safety throughout a machine's entire life cycle from design, manufacture, installation, adjustment, operation and servicing right through to decommissioning.

8

In addition to moral obligation and economic consequences, the law requires that machinery is safe in the interests of accident prevention. Preventa offers an extensive range of safety products, compliant with international standards, designed to provide the most comprehensive protection for personnel and equipment.

Preventa, the safety attitude around your machine life cycle

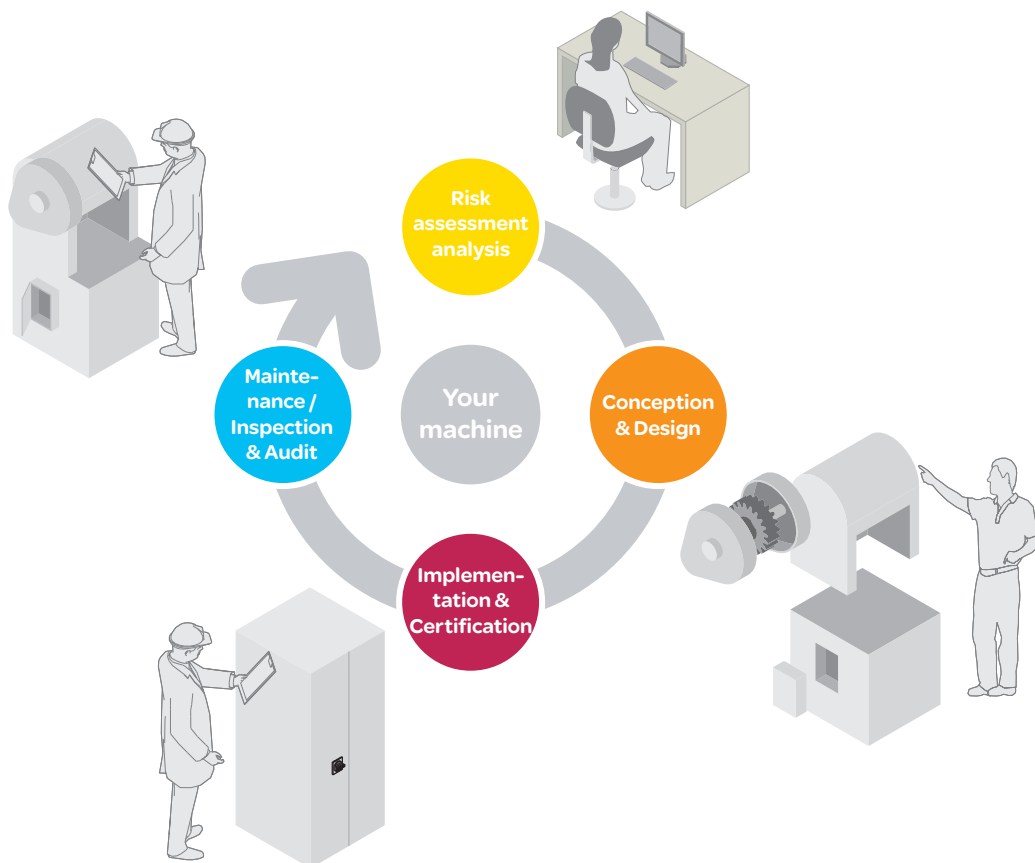

8 | Machine safety



Safety chain solutions 8/4 to 8/7

Automation

Safety PLCs	8/8 and 8/9
Safety controllers and modules	8/10 to 8/14

Operator dialog

Emergency stop buttons	8/15
Foot switches	8/16 and 8/17
Two-hand control and enabling switches	8/18

Motor control

Switch disconnectors	8/19
Motor starters	8/20 and 8/21

> New machines - the Machinery Directive

From 29 December 2009, the new European Machinery Directive 2006/42/EC is effective. Machines have to comply with the Essential Health and Safety Requirements (EHSRs) listed in Annex I of the Directive, thus setting a common minimum level of protection across the EEA (European Economic Area).

Machine manufacturers, or their authorised representatives within the EU, must ensure that their machines are compliant, the Technical File is made available to the enforcing authorities on request, the CE marking is affixed, and a Declaration of Conformity has been signed, before the machine may be placed on the market within the EU.

Why safety?



Human life is the most important
value in a company!

Schneider Electric helps protect people and improve your productivity

Functional safety



Simplifying your work to reach your
required performance level and SIL

Thanks to directives and standards as guidelines and our certified safety
chain solutions

Certified safety chain solutions, designed by Schneider Electric, for you!

The concept:

Provides you certified safety architectures based upon the most common safety functions required on and around a machine. The safety chain solutions enable you to save time and costs when designing and manufacturing your machine in accordance with the European Machinery Directive.

Each solution comes with:

- > Bill of materials and the system description file
- > Safety conceptual principle diagram
- > Layout of solution indicating performance level (PL) and safety integrity level (SIL)
- > Example description of the PL and SIL calculation for the safety function
- > Sistema Library file with corresponding solution
- > TÜV certification



Approved


- > TÜV approval certified solutions




Machine Safety Expertise and Co-design

- > Worldwide support and assistance with a local engineers to help you implement machine safety solutions that meet or exceed the latest legislation and compliance with new functional machine safety standards


Motor starter (PL c, SIL 1)




Light curtain (PL c, SIL 1)

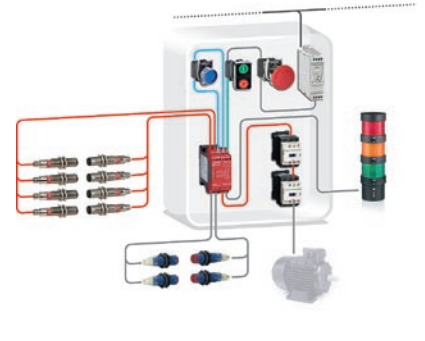

Safe stop 0 (PL d, SIL 2)



Safe stop 0 (PL e, SIL 3)
High performance

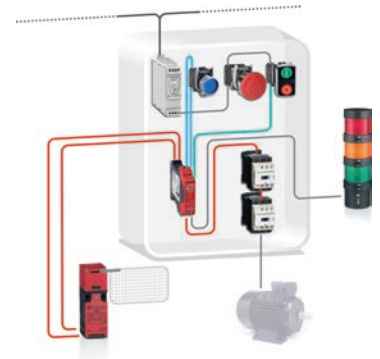





Be confident by using certified safety chain solutions

- > Save cost by reducing external safety expert engineering
- > Reduce machine design time by using our calculations to meet your safety function requirements


Safe stop 1 (PL d, SIL 2)
Variable speed drive

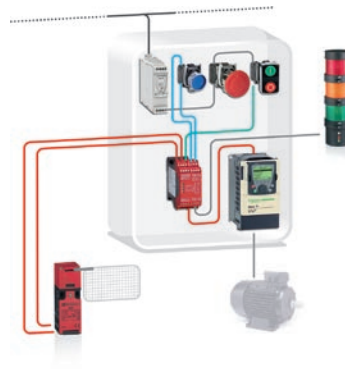


Safe stop 1 (PL e, SIL 3)
High performance



Safe stop 1 (PL e, SIL 3)
Servo drive



Safe stop 2 (PL e, SIL 3)
Servo-enhanced safety

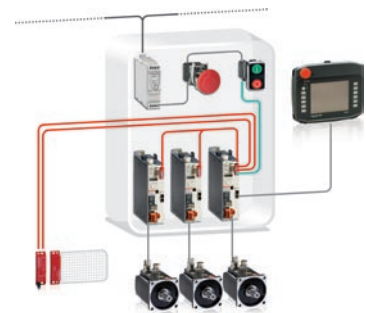


No reason to delay your implementation of the functional standards

- > We guide you step by step on <http://www.schneider-electric.com>
- > Download our Machine Safety guide
- > Select the right safety chain to solve each function
- > Evaluate if your architecture meets the risk reduction requirements by use of the Sistema software tool and Preventa library all downloadable via www.schneider-electric.com.


Safety Mat (PL d, SIL 2)




Magnetic switches (PL e, SIL 3)

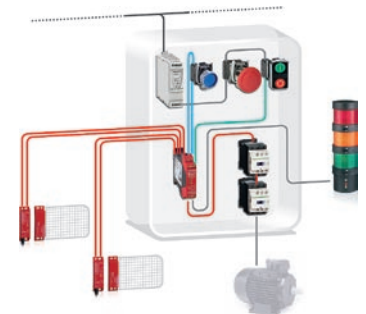


Zero speed detection (PL e, SIL 3)

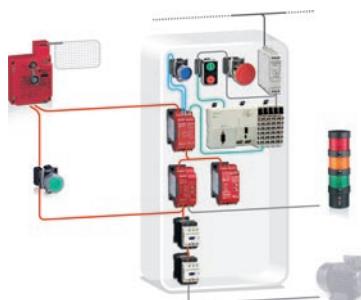

Multifunction (PL e, SIL 3)

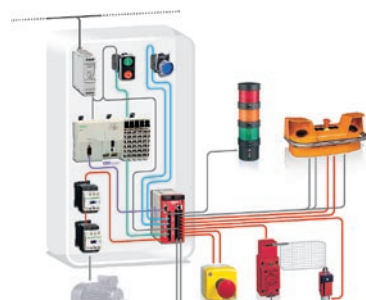

Save cost and time with our Preventa offer

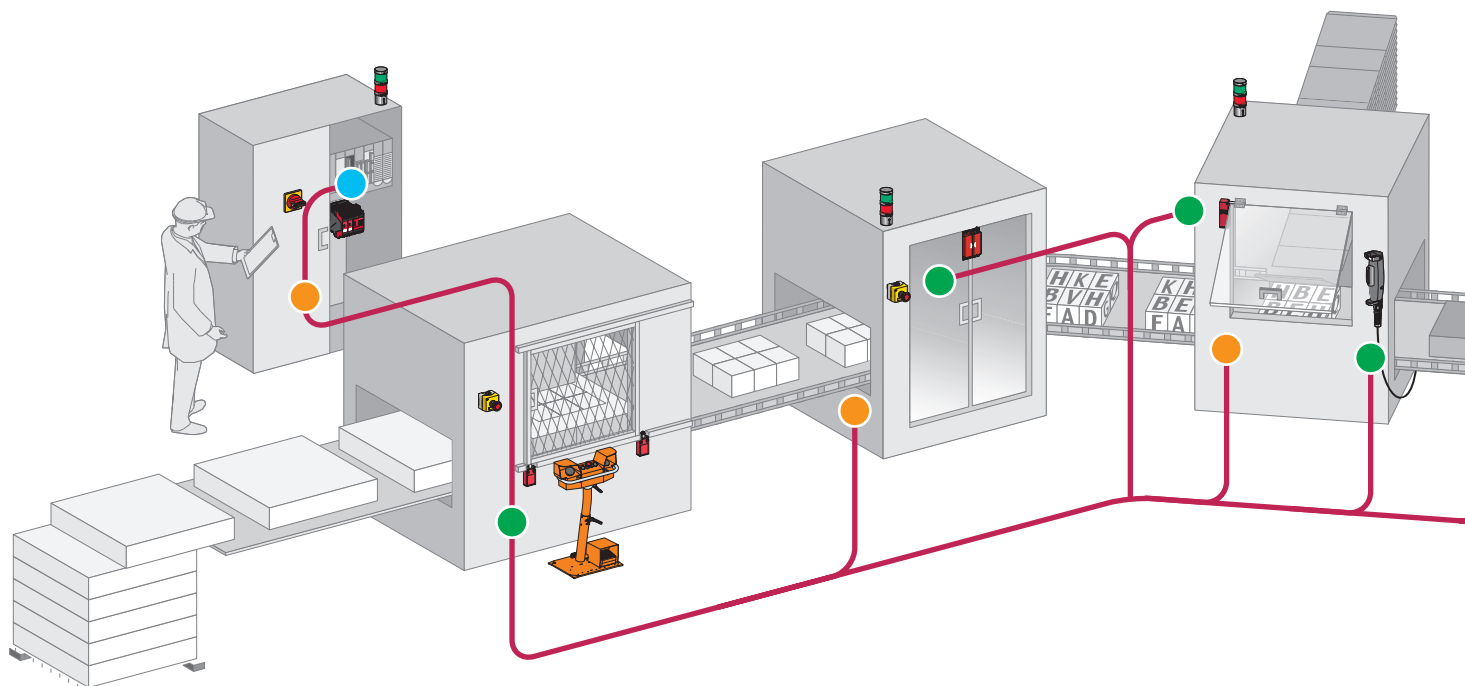

Safe signal transmission

Acquire the information*:

- > Protective guard devices used as part of safeguarding systems to control the access under specific conditions of reduced risk.
- > Light curtains to detect approach to dangerous and limited areas.
- > Two hand control stations and enabling switches for starting and enabling of dangerous movements.
- > Generic protective measures - Emergency stop.



Protective guard devices



Light curtains



Two hand control stations and enabling switches



Emergency stop



Emergency stop rope pull switch

Monitor and processing:

- > Safety modules manage one safety function, monitoring inputs from safety devices and manages the outputs to contactors and drives.
- > Safety controllers: configurable safety device capable of managing multiple safety functions simultaneously
- > Safety PLCs: programmable electronic systems to carry out safety or non-safety related tasks for machinery and equipment.



Safety relays




Safety Controller



Safety PLCs

*For detection products, please refer to the Telemecanique Sensors Essential guide of Detection

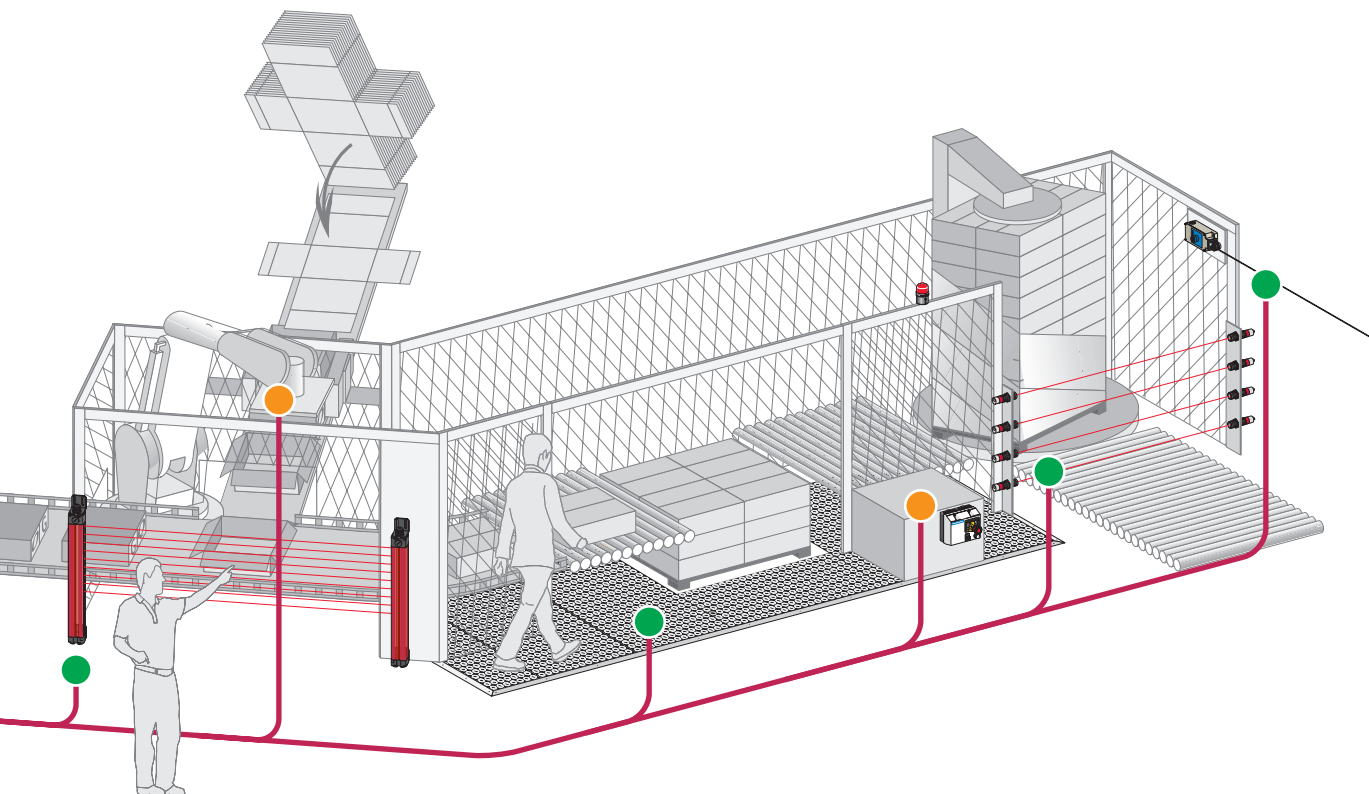

Stop the machine:

- > Contactors to cut-off the electrical power supply to the motors with mechanically linked mirror auxiliary contacts integrated for the feedback loop diagnosis used by the safety modules, controller and PLCs.
- > Variable speed drives and servo drives provide controlled stopping of the machine by using embedded safety functions.
- > Rotary switch disconnectors: for equipment isolation from the electrical supply and/or emergency stop by direct interruption of the power supply.



Variable speed Drives



Servo drives



Contactors



Rotary switch disconnectors

1 Complete & upgraded safety offer:

Improved hardware features and expanded offer

Up to 50% of space optimization

Increase the compactness by reducing size.

Save up to 30% on installation time

Reduce installation time by easy and quick wiring.

8

For all XPSMF PLCs

- Maximum category of the solution **Category 4**
(EN 954-1)
- Max performance level for the solution **PL e**
(EN ISO 13849-1)
- Max safety integrity level for the solution **SIL 3**
(EN IEC 62061)



Safety PLC type		Compact					
Number of inputs/outputs	Digital (configurable with XPSMFWIN software)	24					
	Pulsed (1)	2x4					
Memory capacity	Application	250 Kb					
	Data	250 Kb					
Supply		External 24 VDC supply (with separate protection conforming to IEC 61131-2)					
Communication	On Ethernet network with safe Ethernet protocol	Integrated (2xRJ45)	Integrated (2xRJ45)	Integrated (2xRJ45)	Integrated (2xRJ45)	Integrated (2xRJ45)	Integrated (2xRJ45)
	On Modbus TCP/IP	—	Integrated (2xRJ45)	—	Integrated (2xRJ45)	—	Integrated (2xRJ45)
	On Modbus (Serial link)	—	—	Integrated (1xRJ45)	Integrated (1xRJ45)	—	—
	On Profibus DP	—	—	—	—	Integrated (SUB-D9)	Integrated (SUB-D9)
Input/output connections		Removable screw terminal blocks or removable cage clamp terminal blocks coded with locating device					
References		XPSMF4000	XPSMF4002	XPSMF4020	XPSMF4022	XPSMF4040	XPSMF4042


(1) They outputs are not safety outputs.

Compact



Safety PLC type		Compact				
Number of inputs	Digital	20	20	24	24	24
	Analogue	—	—	8	8	8
	Counting	—	—	2	2	2
Number of outputs	Digital	8	8	8	8	8
	Analogue	—	—	—	—	—
	Relay	—	—	—	—	—
Memory capacity	Application	250 Kb				
	Data	250 Kb				
Supply		External 24 VDC supply (with separate protection conforming to IEC 61131-2)				
Communication	On Ethernet network (Modbus TCP/IP)	Integrated (4xRJ45)	Integrated (4xRJ45)	Integrated (4xRJ45)	Integrated (4xRJ45)	Integrated (4xRJ45)
	On Modbus (Serial link)	Integrated (SUB-D9)	—	—	Integrated (SUB-D9)	—
	On Profibus DP	—	—	—	—	Integrated (SUB-D9)
Input/output connections		Removable screw terminal blocks, coded with locating device				
References (2)		XPSMF3022	XPSMF31222	XPSMF3502	XPSMF3522	XPSMF3542


(2) Products referenced XPSMF30/MF31/MF35 are marked Himatrix F30, F31 and F35.



For all XPSMF PLCs

- Maximum category of the solution **Category 4**
(EN 954-1)
- Max performance level for the solution **PL e**
(EN ISO 13849-1)
- Max safety integrity level for the solution **SIL 3**
(EN IEC 62061)

Type	CPU	Power supply module	Rack with 6 slots	Software
Memory capacity	Application	500 Kb	—	For XPSMF PLCs
	Data	500 Kb	—	
Supply	—	External 24 VDC, integrated	—	
Communication	On Ethernet network (Modbus TCP/IP)	Integrated (4xRJ45)	—	Complete version
	On Modbus bus (Serial link)	Integrated (SUB-D9)	—	SSV1XPSMFWIN
Power connections	Screw terminal blocks	Screw terminal blocks	—	(1)
Dimensions W x D x H	—	—	257 x 239 x 310 mm	Update version
References	XPSMFCPU22	XPSMFPS01	XPSMFGEH01	SSVXPSMFWINUP

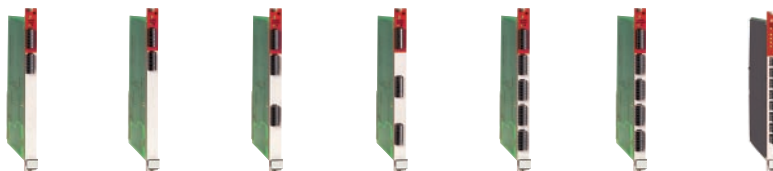

I/O module type		For modular safety PLC						
		Analogue		Digital			Relay	
Number of inputs	Digital	—	—	—	24	32	24	—
	Analogue	8	—	—	—	—	—	—
Number of outputs	Counting	—	—	2	—	—	—	—
	Digital	—	—	4	—	—	16	—
	Analogue	—	8	—	—	—	—	—
	Relay	—	—	—	—	—	—	8
Supply	Removable screw terminal blocks, coded with locating device							
References		XPSMFAI801	XPSMFAO801	XPSMFCIO2401	XPSMFDI2401	XPSMFDI3201	XPSMFDIO241601	XPSMFD0801

Decentralised safety I/O modules




Module type		Inputs/Outputs			
		Digital			
Number of inputs	Digital	16	8+2	16	20
Number of outputs	Digital	–	8	8	8
	Pulsed	4	2	2	–
Supply		External 24 VDC supply (with separate protection conforming to IEC 61131-2)			
Communication	On Safe Ethernet network (Modbus TCP/IP)	Integrated (2xRJ45)			
Input/output connections		Removable screw terminal blocks, coded with locating device			
References (2)		XPSMF1DI1601	XPSMF3DIO8801	XPSMF3DIO16801	XPSMF3DIO20802



I/O module type		Inputs/Outputs Analogue	Outputs Digital		Relay	
Number of inputs	Analogue	8	–	–	–	–
Number of outputs	Digital	–	4	16	–	–
	Analogue (not safety)	4	–	–	–	–
	Relay	–	–	–	8	16
Supply		External 24 VDC supply (with separate protection conforming to IEC 61131-2)				
Communication	On Safe Ethernet network (Modbus TCP/IP)	Integrated (2xRJ45)				
Input/output connections		Removable screw terminal blocks, coded with locating device				
References (2)		XPSMF3AIO8401	XPSMF2DO401	XPSMF2DO1601	XPSMF2DO801	XPSMF2DO1602

(1) To be ordered only if the previous version of have been already installed.

(2) Products referenced **XPSMF1/MF2/MF3** are marked **Himatrix F1, F2 and F3**.

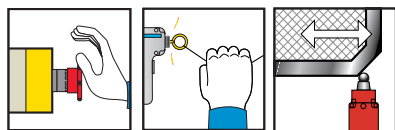

Universal



Maximum safety level of the solution attained (EN ISO 13849-1, EN/IEC 62061)		PL e / Cat. 4, SILCL 3		
Number of circuits	Safety	2 x 2N/O + 6 solid-state		2 x 3N/O per function
	Additional	–		3 solid-state
Display (number of LEDs)		30		12
Width of housing		74 mm		45 mm
Communication interface		Modbus	Modbus, CANopen	Modbus, Profibus DP

Universal solutions: safety controllers (for monitoring several safety functions simultaneously)

Supply voltage	24 VDC	XPSMC32Z (1) (2)	XPSMC32ZC (1) (2)	XPSMC32ZP (1) (2)	XPSMP11123P (3)
----------------	--------	------------------	-------------------	-------------------	-----------------

Coded magnetic switches Enabling switch



Universal




Maximum safety level of the solution attained (EN ISO 13849-1, EN/IEC 62061)		PL e / Cat. 4, SILCL 3		
For monitoring		magnetic switches and enabling switch		
Number of circuits	Safety	2 x 2N/O + 6 solid-state		2 x 3N/O per function
	Additional	–		3 solid-state
Display (number of LEDs)		30		12
Width of housing		74 mm		45 mm
Communication interface		Modbus	Modbus, CANopen	Modbus, Profibus DP

Universal solutions: safety controllers (for monitoring several safety functions simultaneously)

Supply voltage	24 VDC	XPSMC32Z (1)(2)	XPSMC32ZC (1)(2)	XPSMC32ZP (1)(2)	XPSMP11123P (3)
----------------	--------	-----------------	------------------	------------------	-----------------

Safety mats and edging



Universal




Maximum safety level of the solution attained (EN ISO 13849-1, EN/IEC 62061)		PL d / Cat. 3, SILCL 2		
Number of circuits	Safety	2 x 2N/O + 6 solid-state		2 x 3N/O per function
	Additional	–		3 solid-state
Display (number of LEDs)		30		12
Width of housing		74 mm		45 mm
Communication interface		Modbus	Modbus, CANopen	Modbus, Profibus DP

Universal solutions: safety controllers (for monitoring several safety functions simultaneously)

Supply voltage	24 VDC	XPSMC32Z (1)(2)	XPSMC32ZC (1)(2)	XPSMC32ZP (1)(2)	XPSMP11123P (3)
----------------	--------	-----------------	------------------	------------------	-----------------

- (1) Version with 32 inputs. For version with 16 inputs, replace 32 in the reference by 16 (example: XPSMC32Z becomes XPSMC16Z).
 (2) Configuration software XPSMCWIN (complete version), configuration cable, adaptor and set of screw or cage clamp terminal plug-in connectors XPSMCTS16 and XPSMCTS32 or set of spring clip terminal plug-in connectors XPSMCTC16 and XPSMCTC32 to be ordered separately.
 (3) For fixed connector version, delete the letter P from the end of the reference (example: XPSMP11123P becomes XPSMP11123).



Universal




Maximum safety level of the solution attained (EN ISO 13849-1, EN/IEC 62061)		PL e / Cat. 4, SILCL 3		
Number of circuits	Safety	2 x 2N/O + 6 solid-state		
	Additional	–		
Display (number of LEDs)		30		
Width of housing		74 mm		
Communication interface		Modbus	Modbus, CANopen	Modbus, Profibus DP

Universal solutions: safety controllers (for monitoring several safety functions simultaneously)

Supply voltage	24 VDC	XPSMC32Z (1)(2)	XPSMC32ZC (1)(2)	XPSMC32ZP (1)(2)
----------------	--------	-----------------	------------------	------------------

Light curtains



Universal



Maximum safety level of the solution attained (EN ISO 13849-1, EN/IEC 62061)		PL e / Cat. 4, SILCL 3			2 light curtains monitoring max.
Number of circuits	Safety	2 x 2N/O + 6 solid-state			6 PNP solid-state
	Additional	–			1 PNP + 1 NPN
Display (number of LEDs)		30			14 + double display units
Width of housing		74 mm			100 mm
Integral Muting function		Yes			Yes
Communication interface		Modbus	Modbus, CANopen	Modbus, Profibus DP	–

Universal solutions: safety controllers (for monitoring several safety functions simultaneously)


Supply voltage	24 VDC	XPSMC32Z(1)(2)	XPSMC32ZC(1)(2)	XPSMC32ZP(1)(2)	XPSMP11123P (3)	XPSLCM1150 (4)
----------------	--------	----------------	-----------------	-----------------	-----------------	----------------

(1) Version with 32 inputs, for version with 16 inputs, replace 32 in the reference by 16 (example: XPSMC32Z becomes XPSMC16Z).

(3) For version with non removable terminal block, delete the letter P from the end of the reference (example: XPSMP11123P becomes XPSMP11123).

(4) Removable terminal blocks

Zero speed, time delay



Universal




Maximum safety level of the solution attained (EN ISO 13849-1, EN/IEC 62061)		PL e / Cat. 4, SILCL 3		
For monitoring		Motor zero speed condition		
Number of circuits	Safety	2 x 2N/O + 6 solid-state		
	Additional	–		
Display (number of LEDs)		30		
Width of housing		74 mm		
Communication interface		Modbus	Modbus, CANopen	Modbus, Profibus DP

Universal solutions: safety controllers (for monitoring several safety functions simultaneously)

Supply voltage	24 VDC	XPSMC32Z (5) (2)	XPSMC32ZC (5) (2)	XPSMC32ZP (5) (2)
----------------	--------	------------------	-------------------	-------------------

(2) Configuration software XPSMCWIN (complete version), configuration cable, adaptor and set of screw or cage clamp terminal plug-in connectors XPSMCTS16 and XPSMCTS32 or set of spring clip terminal plug-in connectors XPSMCTC16 and XPSMCTC32 to be ordered separately.

(5) Plug-in connector version only.



Maximum safety level of the solution attained (EN ISO 13849-1, EN/IEC 62061)		PL c / Cat. 1 (type IIIA to EN 574/ISO 13851)	PL e / Cat. 4, SILCL 3 (type IIIC to EN 574/ISO 13851)	
Number of circuits	Safety	1N/O	2N/O	2N/O
	Additional	1N/C	1N/C	2 solid-state
Display (number of LEDs)		2	3	3
Width of housing		22.5 mm	22.5 mm	22.5 mm


Optimum solutions: safety modules (for monitoring 1 safety function)

Supply voltage	24 VDC	—	—	XPSBF1132P (1)
	24 VAC/DC	XPSBA5120 (2)	XPSBCE3110P (2)	—

(1) For version with non removable terminal block, delete the letter P from the end of the reference (example: XPSBF1132P becomes XPSBF1132).

(2) For version with cage clamps removable terminal block, change the letter P for C from the end of the reference (example: XPSBCE3110P becomes XPSBCE3110C)

Light curtains




Maximum safety level of the solution attained (EN ISO 13849-1, EN/IEC 62061)		PL c / Cat. 2, SILCL 1	PL e / Cat. 4, SILCL 3		
Number of circuits	Safety	2N/O	3N/O	3N/O	7N/O
	Additional	4 solid-state	—	1N/C + 4 solid-state	1N/C + 4 solid-state
Display (number of LEDs)		4	3	4	4
Width of housing		45 mm	22.5 mm	45 mm	90 mm
Integral Muting function		Yes	No	No	No

Optimum solutions: safety modules (for monitoring 1 safety function)

Supply voltage	24 VDC	XPSCM1144P (1)	—	—	—
	24 VAC/DC	—	XPSAFL5130P (1)	XPSAK311144P (1)	XPSAR311144P (1)

(1) For version with non removable terminal block, delete the letter P from the end of the reference (example: XPSCM1144P becomes XPSCM1144).

Zero speed, time delay and lifts



Maximum safety level of the solution attained (EN ISO 13849-1, EN/IEC 62061)		PL d / Cat. 3, SILCL 2		
For monitoring		Motor zero speed condition	Safety time delay	
Number of circuits	Safety	1N/O + 1N/C	1N/O time delay	1N/O pulse
	Additional	2 solid-state	2N/C + 2 solid-state	2N/C + 2 solid-state
Display (number of LEDs)		4	4	4
Width of housing		45 mm	45 mm	45 mm

Optimum solutions: safety modules (for monitoring 1 safety function)

Supply voltage	24 VDC	XPVNE1142P (1)	—	—
	24 VAC/DC	—	XPSTSA5142P (2)	XPSTSW5142P (2)

(1) Motor frequency ≤ 60 Hz.. For frequencies ≥ 60 Hz, please see: www.schneider-electric.com

(2) Removable terminal block version only.


Preventa Safety modules



Maximum safety level of the solution attained (EN ISO 13849-1, EN/IEC 62061, EN/IEC 61058)		PL e/Cat. 4, SILCL 3		PL e/Cat. 4 (1) and PL d/Cat. 3 (2), SILCL 3 (1) and SILCL 2 (2)	PL e/Cat. 4, SILCL 3
Number of circuits	Safety	3 NO	3 NO	2 NO instantaneous + 3 NO time delay	3 NO instantaneous + 3 NO time delay
	Additional	1 solid-state output for signalling to PLC	1 relay output for signalling to PLC	4 solid-state outputs for signalling to PLC	1 NC
Display (number of LEDs)		2 LEDs	2 LEDs	4 LEDs	5 LEDs
Width of housing		22,5mm	22,5mm	45 mm	45 mm
Supply voltage		24 VDC	XPSAC5121	XPSAXE5120P or XPSAXE5120C	XPSATE5110P
Section Title		For Emergency stop and switch monitoring			For Emergency stop and protective guard applications



Maximum safety level of the solution attained (EN ISO 13849-1, EN/IEC 62061, EN/IEC 61058)		PL e/Cat. 4, SILCL 3	PL e/Cat. 4 (1) and PLC d/Cat. 3 (2), SILCLC 3 (1) and SILCLC 2 (2)	PL e/Cat. 4, SILCL 3
Number of circuits	Safety	3 NO instantaneous + 3 NO time delay	2 NO instantaneous + 1 NO time delay	3 NO
	Additional	3 solid-state outputs for signalling to PLC		
Display (number of LEDs)		11 LEDs	3 LEDs	3 LEDs
Width of housing		45 mm	22,5 mm	22,5 mm
Supply voltage		24 VDC	XPSAV11113P	XPSABV11330P or XPSABV11330C
Section Title		For Emergency stop and switch monitoring		

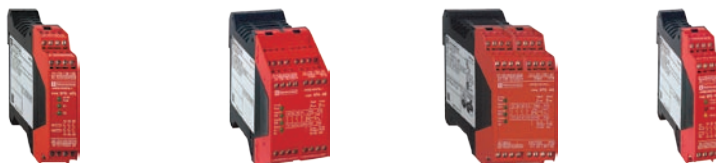

Maximum safety level of the solution attained (EN ISO 13849-1, EN/IEC 62061, EN/IEC 61058)		PL e/Cat. 4, SILCL 3			
Number of circuits	Safety	3 NO	7 NO	3 NO instantaneous	2 NO
	Additional		2 NC + 4 solid-state outputs for signalling to PLC	1 NC + 4 solid-state outputs for signalling to PLC	2 solid-state outputs for signalling to PLC
Display (number of LEDs)		3 LEDs	4 LEDs	4 LEDs	3 LEDs
Width of housing		22,5 mm	90 mm	45 mm	22,5mm
Supply voltage		24 VDC	XPSAFL5130P	XPSAR311144P	XPSAK311144P
Section Title		For Emergency stop, switch or solid-state output safety light curtain monitoring		For Emergency stop, switch, sensing mat/edges or solid-state output safety light curtain monitoring	For enabling switch monitoring

(1) Instantaneous safety outputs.
(2) Time-delay safety outputs.

Preventa Safety modules



Maximum safety level of the solution attained (EN ISO 13849-1, EN/IEC 62061, EN/IEC 61058)		PL c/Cat. 1, SILCL 1	PL e/Cat. 4, SILCL 3		PL c/Cat. 2, SILCL 1
Number of circuits	Safety	1 NO	2 NO	2 NO	2 NO
	Additional	1 NC	1 NC	2 solid-state outputs for signalling to PLC	4 solid-state PNP NO outputs for signalling to PLC
Display (number of LEDs)		2 LEDs	3 LEDs	3 LEDs	4 LEDs
Width of housing		22,5mm	22,5mm	22,5mm	45 mm
Supply voltage		24 VDC	XPSBAE5120P or XPSBAE5120C	XPSBCE3110P or XPSBCE3110C	XPSBF1132P
Section Title		For electrical monitoring of two-hand control stations			To monitor 1 to 4 XUS S single beam photo-electric sensors transmitter-receiver pairs



Maximum safety level of the solution attained (EN ISO 13849-1, EN/IEC 62061, EN/IEC 61058)		PL e/Cat. 4, SILCL 3 (1)		PL d/Cat. 3, SILCL 2	
Number of circuits	Safety	4 NO	8 NO	1 NO time delayed	1 NO pulse type
	Additional	2 NC	1 NC	2 NC + 2 solid-state outputs for signalling to PLC	2 NC + 2 solid-state outputs for signalling to PLC
Display (number of LEDs)		2 LEDs	3 LEDs	4 LEDs	4 LEDs
Width of housing		22,5 mm	45 mm	45 mm	45 mm
Supply voltage		24 VDC	XPSECME5131P or XPSECME5131C	XPSECPE5131P or XPSECPE5131C	XPSTSA5142P
Section Title		For extending the number of safety contacts		For the monitoring of applications requiring safety time delays	



Maximum safety level of the solution attained (EN ISO 13849-1, EN/IEC 62061, EN/IEC 61058)		PL e/Cat. 4, SILCL 3		PL d/Cat. 3, SILCL 2
Number of circuits	Safety	2 NO	2 NO	1 NO + 1 NC
	Additional	2 solid-state outputs for signalling to PLC	2 solid-state outputs for signalling to PLC	2 solid-state outputs for signalling to PLC
Display (number of LEDs)		3 LEDs	15 LEDs	4 LEDs
Width of housing		22,5 mm	45 mm	45 mm
Supply voltage		24 VDC	XPSDME1132P	XPSVNE1142P (>60 Hz) or XPSVNE1142HSP (<60 Hz)
Section Title		For coded magnetic switch monitoring		For zero speed detection of AC or DC motors which produce a remanent voltage in their windings due to residual magnetism


(1) When connected to the appropriate module.

Preventa

Operator dialog

Emergency stops



Ø 22 trigger action latching pushbuttons

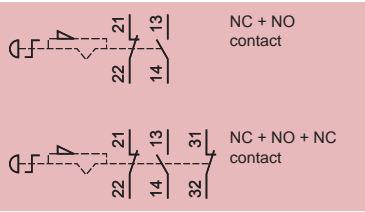


Pushbuttons		Metal		Plastic	
Mechanical life (millions of operating cycles)		0.3		0.3	
Shock / vibration resistance		10 gn / 5 gn		10 gn / 5 gn	
Degree of protection		IP 66		IP 66	
Rated operational characteristics		AC 15, A 600 / DC 13, Q 600 (conforming to EN IEC 60947-5-1)			
Dimensions Ø x Depth		Ø 40 x 82 mm	Ø 40 x 104 mm	Ø 40 x 81.5 mm	Ø 40 x 103 mm
Contact	NC + NO	XB4BS8445	XB4BS9445	XB5AS8445	XB5AS9445
	2 NC + 1 NO	XB4BS84441	ZB4BS944+ZB4BZ141	ZB5AS844 + ZB5AZ141	ZB5AS944+ZB5AZ141



Ø 22 trigger action latching pushbutton stations

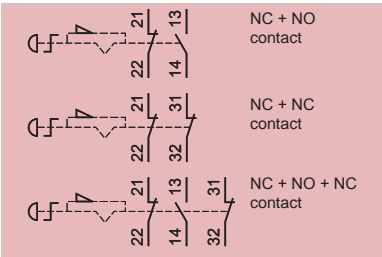

Turn to release




Key release (key n° 455)

Enclosure		Plastic	
		2 x ISO M20 cable entries or n° 13 (Pg 13.5) cable gland	
Mechanical life (millions of operating cycles)		0.1	0.1
Shock / vibration resistance		10 gn / 5 gn	10 gn / 5 gn
Degree of protection		IP 66	IP 66
Rated operational characteristics		AC 15, A 600 / DC 13, Q 600 (conforming to EN IEC 60947-5-1)	
Dimensions W x D x H		68 x 91 x 68 mm	68 x 113 x 68 mm
Contact	NC + NO	XALK178E	XALK188E
	NC + NC	XALK178F	XALK188F
	2 NC + 1 NO	–	XALK188G

Accessories






With legend holder

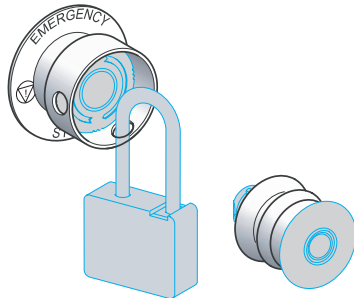

Type			Étiquettes		Padlocking kit	Bellows seals	
Colour			Red with white lettering		Yellow with black lettering	Yellow	Red Silicone Black EPDM
Dimensions			30 x 40 mm (1)		Ø 60 mm		
Références	Marking:	"Arrêt d'urgence"	ZBY2130	ZBY9130	–	–	–
		"Emergency stop"	ZBY2330	ZBY9330	–	–	–
		"Not Halt"	ZBY2230	ZBY9230	–	–	–
			–	–	ZBZ3605	ZBZ48	ZBZ28

(1) circular appearance





ISO entry
(to EN 50262)



Type			Foot switches without protective cover			
			2 cable entries for n° 16 (Pg 16) cable gland (1)			
Trigger mechanism			With (positive operating action reqd.)		Without	
Colour			Orange		Blue	Orange
Mechanical life (millions of operating cycles)			15			
Degree of protection			IP 66			
Shock resistance			100 joules			
Rated operational characteristics			AC 15, A 300 / DC 13, Q 300 (conforming to EN IEC 60947-5-1)			
Dimensions W x D x H			104 x 172 x 59 mm			
Contact operation	1 step	1 NC + NO	XPER810	XPER110	XPER110	
		2 NC + NO	XPER811	XPER111	XPER111	
	2 step	2 NC + NO	XPER911	XPER211	XPER211	
		Analogue output	XPER929	—	XPER229	

(1) For entry for ISO M20 cable gland, also order adaptor DE9RA1620 (sold in lots of 5).

ISO entry
(to EN 50262)





Type			Foot switches without protective cover			
			2 cable entries for n° 16 (Pg 16) cable gland (1)			
Trigger mechanism			With (positive operating action reqd.)		Without	
Colour			Blue	Orange	Blue	Orange
Mechanical life (millions of operating cycles)			15			
Degree of protection			IP 66			
Shock resistance			100 joules			
Rated operational characteristics			AC 15, A 300 / DC 13, Q 300 (conforming to EN IEC 60947-5-1)			
Dimensions W x D x H			160 x 186 x 152 mm			
Contact operation	1 step	1 NC + NO	XPEM510	XPER510	XPEM310	XPER310
		2 NC + NO	XPEM511	XPER511	XPEM311	XPER311
	1 step latching	1 NC + NO	—	—	XPEM410	XPER410
	2 step	2 NC + NO	XPEM711	XPER711	XPEM611	XPER611
	Analogue output		XPEM529	XPER529	XPEM329	—

(1) For entry for ISO M20 cable gland, also order adaptor DE9RA1620 (sold in lots of 5).

Double pedal switches




ISO entry
(to EN 50262)



Type			Foot switches without protective cover			
			2 cable entries for n° 16 (Pg 16) cable gland (1)			
Trigger mechanism			With (positive operating action reqd.)		Without	
Colour			Blue	Orange	Blue	Orange
Mechanical life (millions of operating cycles)			15			
Degree of protection			IP 66			
Shock resistance			100 joules			
Rated operational characteristics			AC 15, A 300 / DC 13, Q 300 (conforming to EN IEC 60947-5-1)			
Dimensions W x D x H			295 x 190 x 155 mm			
Contact operation	1 step	2 x 1 NC + NO	XPEM5100D	XPER510D	XPEM3100D	XPER3100D
		2 x 2 NC + NO	XPEM5110D	XPER5110D	XPEM3110D	XPER3110D





(1) For entry for ISO M20 cable gland, also order adaptor DE9RA1620 (sold in lots of 5).

ISO entry
(to EN 50262)



Type			Without protective cover		With protective cover	
			2 cable entries for ISO M20 cable gland			
Trigger mechanism			Without		With (positive operating action reqd.)	
Colour			Yellow		Yellow	Yellow
Mechanical life (millions of operating cycles)			5			
Degree of protection			IP 55			
Shock resistance			30 joules			
Rated operational characteristics			AC 15, A 300 / DC 13, Q 300 (conforming to EN IEC 60947-5-1)			
Dimensions W x D x H			160 x 280 x 70 mm		160 x 280 x 162 mm	160 x 280 x 162 mm
Contact operation	1 step	1 NC + NO	XPEY110		XPEY310	XPEY510
		2 NC + NO	—		XPEY311	XPEY511
	2 step	2 NC + NO	XPEY211		XPEY611	XPEY711





ISO entry
(to EN 50262)




Type			Foot switches without protective cover			1 entry (1)
			2 cable entries for ISO M20 cable gland			
Trigger mechanism			With (positive operating action reqd.)		Without	Without
Colour			Grey+	Blue	Grey	Black
Mechanical life (millions of operating cycles)			10			2
Degree of protection			IP 66			IP 43
Shock resistance			100 joules			
Rated operational characteristics			AC 15, A 300 / DC 13, Q 300 (conforming to EN IEC 60947-5-1)			
Dimensions W x D x H			160 x 280 x 70 mm			94 x 161 x 54 mm
Contact operation	1 step	1 NC + NO	XPEG810	XPEB110	XPEG110	XPEA110
		2 NC + NO	–	XPEB111	XPEG111	XPEA111
	2 step	2 NC + NO	XPEG911	XPEB211	XPEG211	–

(1) Cable entry for ISO M16 or n° 9 (Pg 9) cable gland and for ISO M20 or n° 13 (Pg 13.5) cable gland.


ISO entry
(to EN 50262)



Type			Foot switches with protective cover			
			2 cable entries for ISO M20 cable gland			
Trigger mechanism			With (positive operating action reqd.)		Without	
Colour			Grey	Blue	Grey	Blue
Mechanical life (millions of operating cycles)			10			
Degree of protection			IP 66			
Shock resistance			100 joules			
Rated operational characteristics			AC 15, A 300 / DC 13, Q 300 (conforming to EN IEC 60947-5-1)			
Dimensions W x D x H			180 x 280 x 162 mm			
Contact operation	1 step	1 NC + NO	XPEG510	XPEB510	XPEG310	XPEB310
		2 NC + NO	XPEG511	XPEB511	XPEG311	XPEB311
	2 step	2 NC + NO	XPEG711	XPEB711	XPEG611	XPEB611



2 control pushbuttons and 1 mushroom head
Emergency stop or Lock out pushbutton








2 control pushbuttons and 1 mushroom head Emergency
stop or Lock out pushbutton, with pre-wired terminal block

Type	Two-hand control stations	
	2 cable entries for ISO M20 or n° 13 (Pg 13.5) cable gland, 1 cable entry for n° 21 (Pg 21) cable gland (2)	
Mechanical life (millions of operating cycles)	1	1
Degree of protection	IP 65	IP 65
Rated operational characteristics	AC 15, A 600 / DC 13, Q 600 (conforming to EN IEC 60947-5-1)	
Dimensions W x D x H	455 x 170 x 188.5 mm	
Red emergency stop (NC + NC slow break)	XY2SB71 (1)	XY2SB72 (1)
Yellow lock out (NC + NO break before make)	XY2SB75	XY2SB76

- (1) To order a two-hand control station with pedestal XY2SB90, add 4 to the end of the reference (example: XY2SB71 becomes XY2SB714).
- (2) For entry for ISO M25 cable gland, also order adaptor DE9RA2125 + fixing nut DE9EC21 (sold in lots of 5).



Enabling switch

Contact states

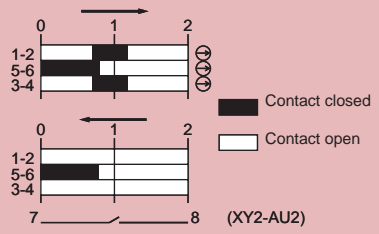


Type	Plastic grip	
	Entry for Ø 7 to 13 mm cable	
Number of contacts	3	3
Type of contacts	2 NO + 1 NC	2 NO + 1 NC 1 NO auxiliary
Description	3 positions	3 positions with button for NO contact (auxiliary)
Shock / vibration resistance	10 gn / 6 gn	
Degree of protection	IP 66	IP 65
Rated operational characteristics	AC 15, C300 / DC 13, R300 (conforming to EN IEC 60947-5-1)	
Dimensions W x D x H	46 x 58 x 261 mm	46 x 58 x 269 mm
References	XY2AU1	XY2AU2

For fixing accessories, please refer to www.schneider-electric.com.





Door mounting




Backplate mounting in enclosure

Type	Mini-Vario for standard applications	
Front plate dimensions (mm)	60 x 60	60 x 60
Fixing	Ø 22.5 mm	Ø 22.5 mm
Degree of protection	IP 20	IP 20
Rated operational voltage (Ue)	690 V	690 V
Thermal current in open air (Ith)	12 A 20 A	VCDN12 VCDN20







Door mounting

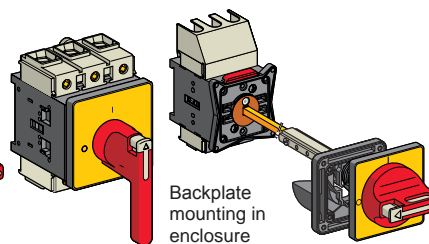

Backplate mounting in enclosure


Type	Vario for high performance applications					
Front plate dimensions (mm)	60 x 60	60 x 60	90 x 90	60 x 60	60 x 60	90 x 90
Fixing	Ø 22.5 mm	4 screws	4 screws	Ø 22.5 mm	4 screws	4 screws
Degree of protection	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20
Rated operational voltage (Ue)	690 V	690 V	690 V	690 V	690 V	690 V
Thermal current in open air (Ith)	12 A	VCD02	VCF02	–	VCCD02	VCCF02
	20 A	VCD01	VCF01	–	VCCD01	VCCF01
	25 A	VCD0	VCF0	–	VCCD0	VCCF0
	32 A	VCD1	VCF1	–	VCCD1	VCCF1
	40 A	VCD2	VCF2	–	VCCD2	VCCF2
	63 A	–	VCF3	–	–	VCCF3
	80 A	–	VCF4	–	–	VCCF4
	125 A	–	–	VCF5	–	–
	175 A	–	–	VCF6	–	–

Enclosed




Type	Mini-Vario	Vario
Front plate dimensions (mm)	60 x 60	60 x 60
Dimensions W x D x H	82.5 x 106 x 131 mm	90 x 131 x 146 mm
Degree of protection	IP 55	IP 65
Rated operational voltage (Ue)	690 V	690 V
Thermal current in enclosure (Ithe)	10 A	VCFN12GE
	16 A	VCFN20GE
	20 A	VCFN25GE
	25 A	VCFN32GE
	32 A	VCFN40GE
	50 A	–
	63 A	–
	100 A	–
	140 A	–

(1) Dimensions W x D x H: 150 x 152 x 170 mm.





Complete circuit-breaker: circuit-breaker
+ enclosure + safety device.

Ex.: GV2ME01 + GV2MC02 + GV2K04.



Type	Thermal-magnetic motor circuit-breakers					
Motor power	kW (on 400 V)	—	0.06	0.09	0.12...0.18	0.25...0.37
Setting range	A	0.1...0.16	0.16...0.25	0.25...0.40	0.40...0.63	0.63...1
Current $I_d \pm 20\%$	A	1.5	2.4	5	8	13
Current I_{the} (in enclosure)	A	0.16	0.25	0.40	0.63	1
Reference		GV2ME01	GV2ME02	GV2ME03	GV2ME04	GV2ME05
Motor power	kW (on 400 V)	0.37...0.55	0.75	1.1...1.5	2.2	3...4
Setting range	A	1...1.6	1.6...2.5	2.5...4	4...6.3	6...10
Current $I_d \pm 20\%$	A	22.5	33.5	51	78	138
Current I_{the} (in enclosure)	A	1.6	2.5	4	6.3	9
Reference		GV2ME06	GV2ME07	GV2ME08	GV2ME10	GV2ME14
Motor power	kW (on 400 V)	5.5	7.5	9...11	11	15
Setting range	A	9...14	13...18	17...23	20...25	24...32
Current $I_d \pm 20\%$	A	170	223	327	327	416
Current I_{the} (in enclosure)	A	13	17	21	23	24
Reference		GV2ME16	GV2ME20	GV2ME21	GV2ME22	GV2ME32




Enclosure



Type	Empty enclosure	
Mounting	Surface mounting	Flush mounting
Degree of protection	IP 55	IP 55 (front face)
Dimensions W x D x H (1)	93 x 145.5 x 147 mm	93 x 55 x 126 mm
References	GV2MC02	GV2MP02

(1) Dimensions with safety device GV2K04 fitted.




Safety device





Type	Safety devices		
With red mushroom head	Turn to release Padlockable in "Off" position	Turn to release	Key release (key n° 455)
References	GV2K04	GV2K031	GV2K021

Enclosed motor starters

Enclosed DOL



Type				Non reversing		Reversing
Degree of protection				IP 657		IP 657
Standard motor power ratings (kW), category AC3				Basic reference, to be completed by code indicating voltage (1)		
220/230 V	400/415 V	440 V	lth setting range (A)			
—	0.06	0.06	0.16...0.25	LG1K065●●02	LG7K06●●02	LG8K06●●02
0.06	0.09	0.12	0.25...0.40	LG1K065●●03	LG7K06●●03	LG8K06●●03
—	0.18	0.18	0.40...0.63	LG1K065●●04	LG7K06●●04	LG8K06●●04
0.12	0.25	0.25	0.63...1	LG1K065●●05	LG7K06●●05	LG8K06●●05
0.25	0.55	0.55	1...1.6	LG1K065●●06	LG7K06●●06	LG8K06●●06
0.37	0.75	1.1	1.6...2.5	LG1K065●●07	LG7K06●●07	LG8K06●●07
0.75	1.5	1.5	2.5...4	LG1K065●●08	LG7K06●●08	LG8K06●●08
1.1	2.2	3	4...6.3	LG1K065●●10	LG7K06●●10	LG8K06●●10
1.5	4	4	6...10	LG1K095●●14	LG7K09●●14	LG8K09●●14
3	5.5	5.5	9...14	LG1D122●●16	LG7D12●●16	LG8K12●●16
4	7.5	9	13...18	LG1D182●●20	LG7D18●●20	—
4	9	9	17...23	LG1D182●●21	LG7D18●●21	—



With integral control transformer, 400/24 V

With integral control transformer, 400/24 V

Type				Non reversing		Reversing
Degree of protection				IP 657		IP 657
Standard motor power ratings (kW), category AC3				Basic references		
380/400 V				(The code Q7 (380/400 V) designates the power supply voltage to which the starter will be connected)		
0.06			0.16...0.25	LJ7K06Q702		LJ8K06Q702
0.09			0.25...0.40	LJ7K06Q703		LJ8K06Q703
0.18			0.40...0.63	LJ7K06Q704		LJ8K06Q704
0.25			0.63...1	LJ7K06Q705		LJ8K06Q705
0.55			1...1.6	LJ7K06Q706		LJ8K06Q706
0.75			1.6...2.5	LJ7K06Q707		LJ8K06Q707
1.5			2.5...4	LJ7K06Q708		LJ8K06Q708
2.2			4...6.3	LJ7K06Q710		LJ8K06Q710
4			6...10	LJ7K09Q714		LJ8K09Q714

Control circuit voltages available

Volts 50/60 Hz	24 V	230 V	400 V	415 V
(1) Voltage code	B7	P7	V7	N7

The control circuit must be cabled by the user.